

クライミングクレーン

ダム用クレーン

ジブクレーン


固定式ジブクレーン 外装取付用

解体用ジブクレーン

解体用小分解体型ジブクレーン

クレーン周辺機器その他

参考資料

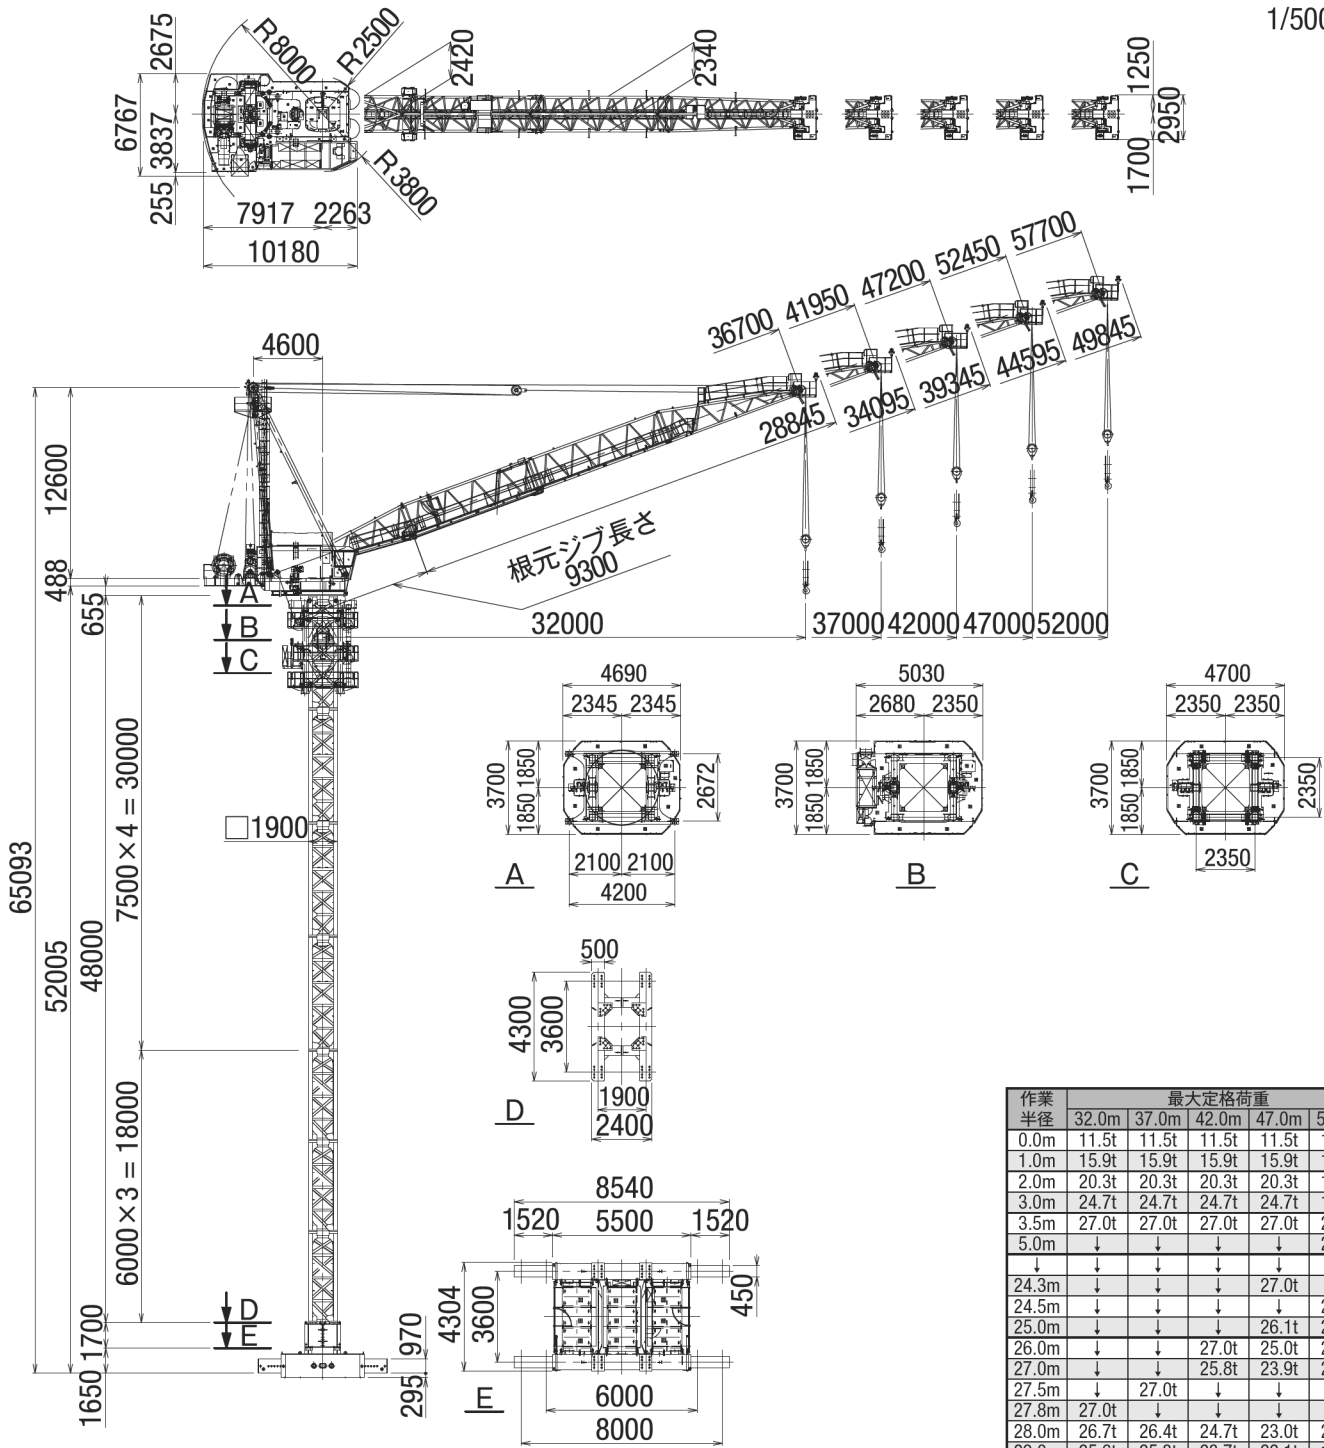

作業半径	最大定格荷重				
	32.0m	37.0m	42.0m	47.0m	52.0m
0.0m	11.5t	11.5t	11.5t	11.5t	11.5t
1.0m	15.9t	15.9t	15.9t	15.9t	14.1t
2.0m	20.3t	20.3t	20.3t	20.3t	16.8t
3.0m	24.7t	24.7t	24.7t	24.7t	19.5t
3.5m	27.0t	27.0t	27.0t	27.0t	22.2t
5.0m	↓	↓	↓	↓	25.0t
↓	↓	↓	↓	↓	↓
24.3m	↓	↓	↓	27.0t	↓
24.5m	↓	↓	↓	↓	25.0t
25.0m	↓	↓	↓	26.1t	24.3t
26.0m	↓	↓	27.0t	25.0t	23.1t
27.0m	↓	↓	25.8t	23.9t	21.9t
27.5m	↓	27.0t	↓	↓	↓
27.8m	27.0t	↓	↓	↓	↓
28.0m	26.7t	26.4t	24.7t	23.0t	20.8t
29.0m	25.6t	25.3t	23.7t	22.1t	19.9t
30.0m	24.5t	24.2t	22.8t	21.2t	18.9t
31.0m	23.5t	23.3t	21.9t	20.4t	18.1t
32.0m	22.5t	22.3t	21.1t	19.7t	17.2t
33.0m		21.5t	20.3t	19.0t	16.5t
34.0m		20.7t	19.6t	18.4t	15.7t
35.0m		19.9t	18.9t	17.8t	15.0t
36.0m		19.2t	18.2t	17.2t	14.4t
37.0m		18.5t	17.6t	16.6t	13.8t
38.0m			17.1t	16.1t	13.2t
39.0m			16.5t	15.6t	12.6t
40.0m			16.0t	15.2t	12.1t
41.0m			15.5t	14.8t	11.6t
42.0m			15.0t	14.3t	11.1t
43.0m				14.0t	10.7t
44.0m				13.6t	10.2t
45.0m				13.2t	9.9t
46.0m				12.8t	9.5t
47.0m				12.5t	9.1t
48.0m					8.8t
49.0m					8.4t
50.0m					8.1t
51.0m					7.8t
52.0m					7.5t

名称		JCC-TS750S				
定格荷重	t	22.5 - 11.5	18.5 - 11.5	15.0 - 11.5	12.5 - 11.5	7.5 - 11.5
作業半径	m	32	37	42	47	52
揚程	m	250m				
速度	巻上	m/min 114.7 - 25.7				
	起伏	sec 107, 106, 105, 107, 111				
	旋回	r.p.m 0.48				
	昇降	m/min 50/60Hz				
電動機	巻上	kW 132				
	起伏	kW 55				
	旋回	kW 18.5				
	昇降	kW 22				
操作		運転室				
電源容量	kVA・A	300・400				
電源	V	50/60Hz				