

クライミングクレーン

ダム用クレーン

ジブクレーン



固定式ジブクレーン 外表取付用

解体用ジブクレーン

解体用小分解型ジブクレーン

クレーン周辺機器その他

参考資料

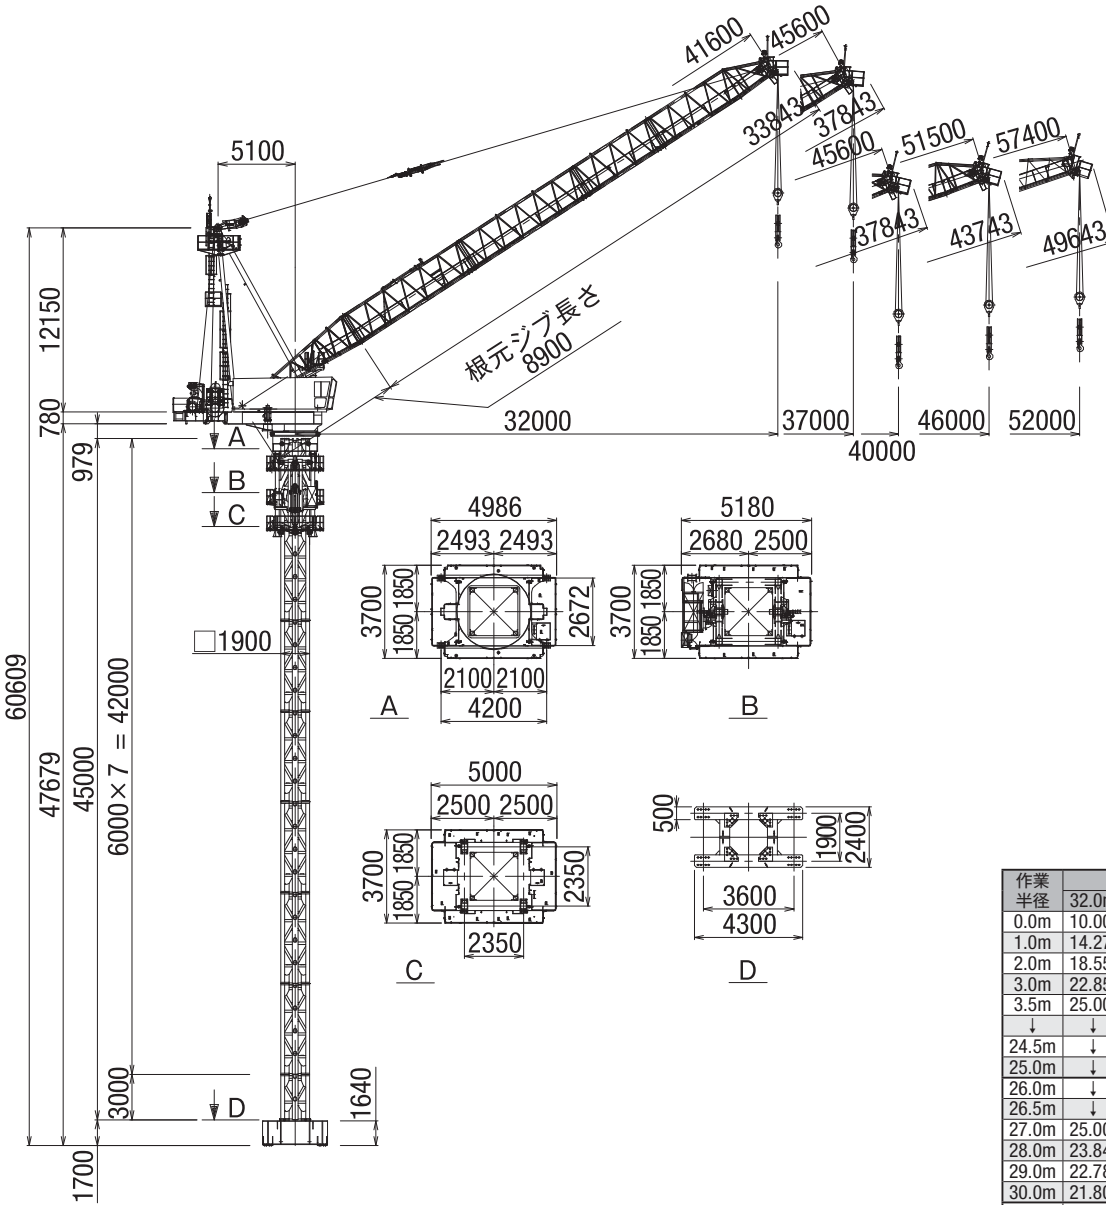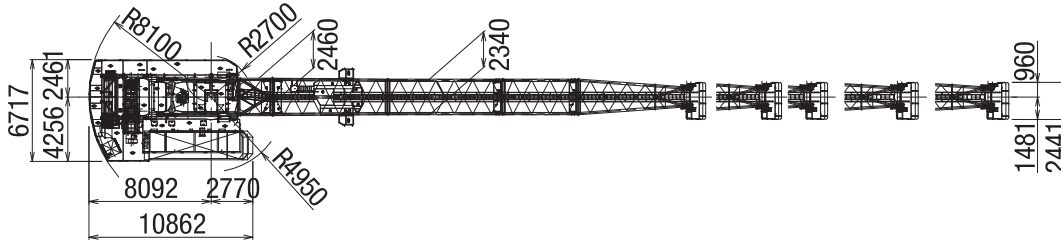

名称		JCC-V600S (高自立 45 m)				
定格荷重	t	25 - 20	25 - 15.5	25 - 14	25 - 10.5	25 - 7.5
作業半径	m	27 - 32	26.5 - 37	26.5 - 40	26 - 46	24.5 - 52
揚程	m	250				
速度	巻上	m/min 110 - 22 (2t以下 - 25t)				
	起伏	sec 97, 112, 121, 139, 157				
	旋回	r.p.m 0.48 (0 - 12.5t) / 0.3 (12.5 - 18t) / 0.2 (18 - 25t)				
	昇降	m/min 50/60Hz 0.56/0.68 (押出) 0.81/0.99 (引込)				
電動機	巻上	kW 110				
	起伏	kW 48.1				
	旋回	kW 22				
	昇降	kW 22				
操作		運転室				
電源容量	kVA · A	250 · 400				
電源	V	50/60Hz 400/440				

作業半径	最大作業半径				
	32.0m	37.0m	40.0m	46.0m	52.0m
0.0m	10.00t	10.00t	10.00t	10.00t	10.00t
1.0m	14.27t	14.27t	14.27t	14.28t	14.28t
2.0m	18.55t	18.56t	18.56t	18.56t	18.56t
3.0m	22.85t	22.85t	22.85t	22.85t	22.85t
3.5m	25.00t	25.00t	25.00t	25.00t	25.00t
↓	↓	↓	↓	↓	↓
24.5m	↓	↓	↓	↓	25.00t
25.0m	↓	↓	↓	↓	24.34t
26.0m	↓	↓	↓	25.00t	23.10t
26.5m	↓	25.00t	25.00t	24.36t	22.52t
27.0m	25.00t	24.38t	24.38t	23.75t	21.96t
28.0m	23.84t	23.20t	23.20t	22.60t	20.89t
29.0m	22.78t	22.10t	22.10t	21.53t	19.90t
30.0m	21.80t	21.07t	21.07t	20.53t	18.97t
31.0m	20.90t	20.11t	20.11t	19.60t	18.10t
32.0m	20.00t	19.20t	19.20t	18.73t	17.28t
33.0m		18.40t	18.36t	17.91t	16.51t
34.0m		17.63t	17.60t	17.13t	15.78t
35.0m		16.90t	16.90t	16.40t	15.08t
36.0m		16.19t	16.26t	15.70t	14.43t
37.0m		15.50t	15.66t	15.03t	13.80t
38.0m			15.09t	14.42t	13.20t
39.0m			14.54t	13.84t	12.62t
40.0m			14.00t	13.31t	12.09t
41.0m				12.80t	11.59t
42.0m				12.32t	11.13t
43.0m				11.85t	10.70t
44.0m				11.40t	10.29t
45.0m				10.96t	9.90t
46.0m				10.50t	9.53t
47.0m					9.18t
48.0m					8.84t
49.0m					8.50t
50.0m					8.17t
51.0m					7.84t
52.0m					7.50t