

クライミングクレーン

ダム用クレーン

ジブクレーン



固定式ジブクレーン外装取付用

解体用ジブクレーン

解体用小分解型ジブクレーン

クレーン周辺機器その他

参考資料

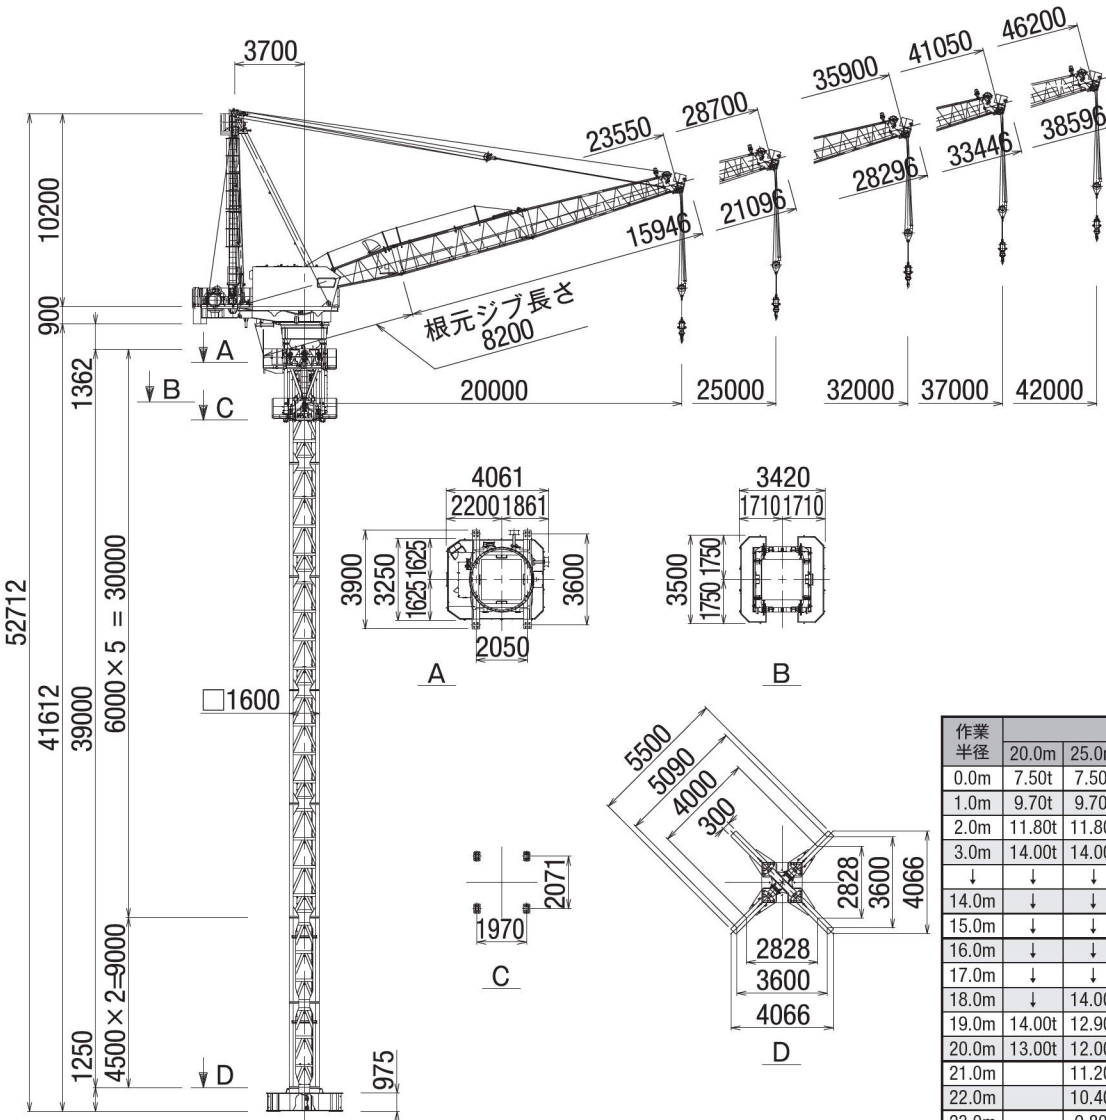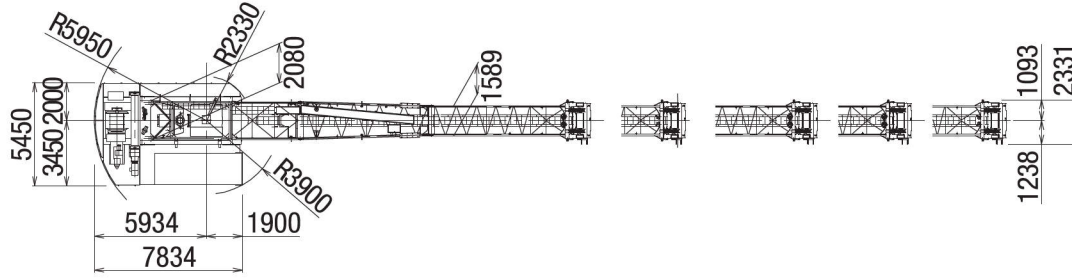

作業半径	最大作業半径				
	20.0m	25.0m	32.0m	37.0m	42.0m
0.0m	7.50t	7.50t	7.50t	7.50t	7.50t
1.0m	9.70t	9.70t	9.70t	9.70t	8.30t
2.0m	11.80t	11.80t	11.80t	11.80t	9.20t
3.0m	14.00t	14.00t	14.00t	14.00t	10.00t
↓	↓	↓	↓	↓	↓
14.0m	↓	↓	↓	↓	↓
15.0m	↓	↓	↓	14.00t	10.00t
16.0m	↓	↓	14.00t	12.90t	9.50t
17.0m	↓	↓	12.90t	12.00t	9.10t
18.0m	↓	14.00t	11.90t	11.20t	8.60t
19.0m	14.00t	12.90t	11.10t	10.40t	8.20t
20.0m	13.00t	12.00t	10.40t	9.80t	7.90t
21.0m		11.20t	9.70t	9.20t	7.50t
22.0m		10.40t	9.20t	8.70t	7.10t
23.0m		9.80t	8.70t	8.20t	6.80t
24.0m		9.30t	8.20t	7.80t	6.50t
25.0m		8.80t	7.80t	7.40t	6.20t
26.0m			7.40t	7.00t	5.90t
27.0m			7.10t	6.70t	5.70t
28.0m			6.80t	6.30t	5.40t
29.0m			6.50t	6.00t	5.10t
30.0m			6.20t	5.80t	4.90t
31.0m			6.00t	5.50t	4.70t
32.0m			5.70t	5.30t	4.40t
33.0m				5.00t	4.20t
34.0m				4.80t	4.00t
35.0m				4.60t	3.80t
36.0m				4.40t	3.60t
37.0m				4.20t	3.50t
38.0m					3.30t
39.0m					3.10t
40.0m					3.00t
41.0m					2.80t
42.0m					2.70t

名称		OTA-190S				
定格荷重	t	14 - 13	14 - 8.8	14 - 5.7	14 - 4.2	10 - 2.7
作業半径	m	19 - 20	18 - 25	16 - 32	15 - 37	15 - 42
揚程	m	最大半径時 100 最小半径時 200				
速度	巻上	m/min	31 (14t) / 115 (2.5t)			
	起伏	sec	120			
	旋回	r.p.m	0.49			
	昇降	m/min	0.5 / 0.6			
電動機	巻上	kW	90			
	起伏		22			
	旋回		9.75			
	昇降		15			
操作		運転室				
電源容量	kVA · A	200 · 300				
電源	V	50/60Hz				
		400/440				