

クライミングクレーン

ダム用クレーン

ジブクレーン


固定式ジブクレーン 外装取付用

解体用ジブクレーン

解体用小分解型ジブクレーン

クレーン周辺機器その他

参考資料

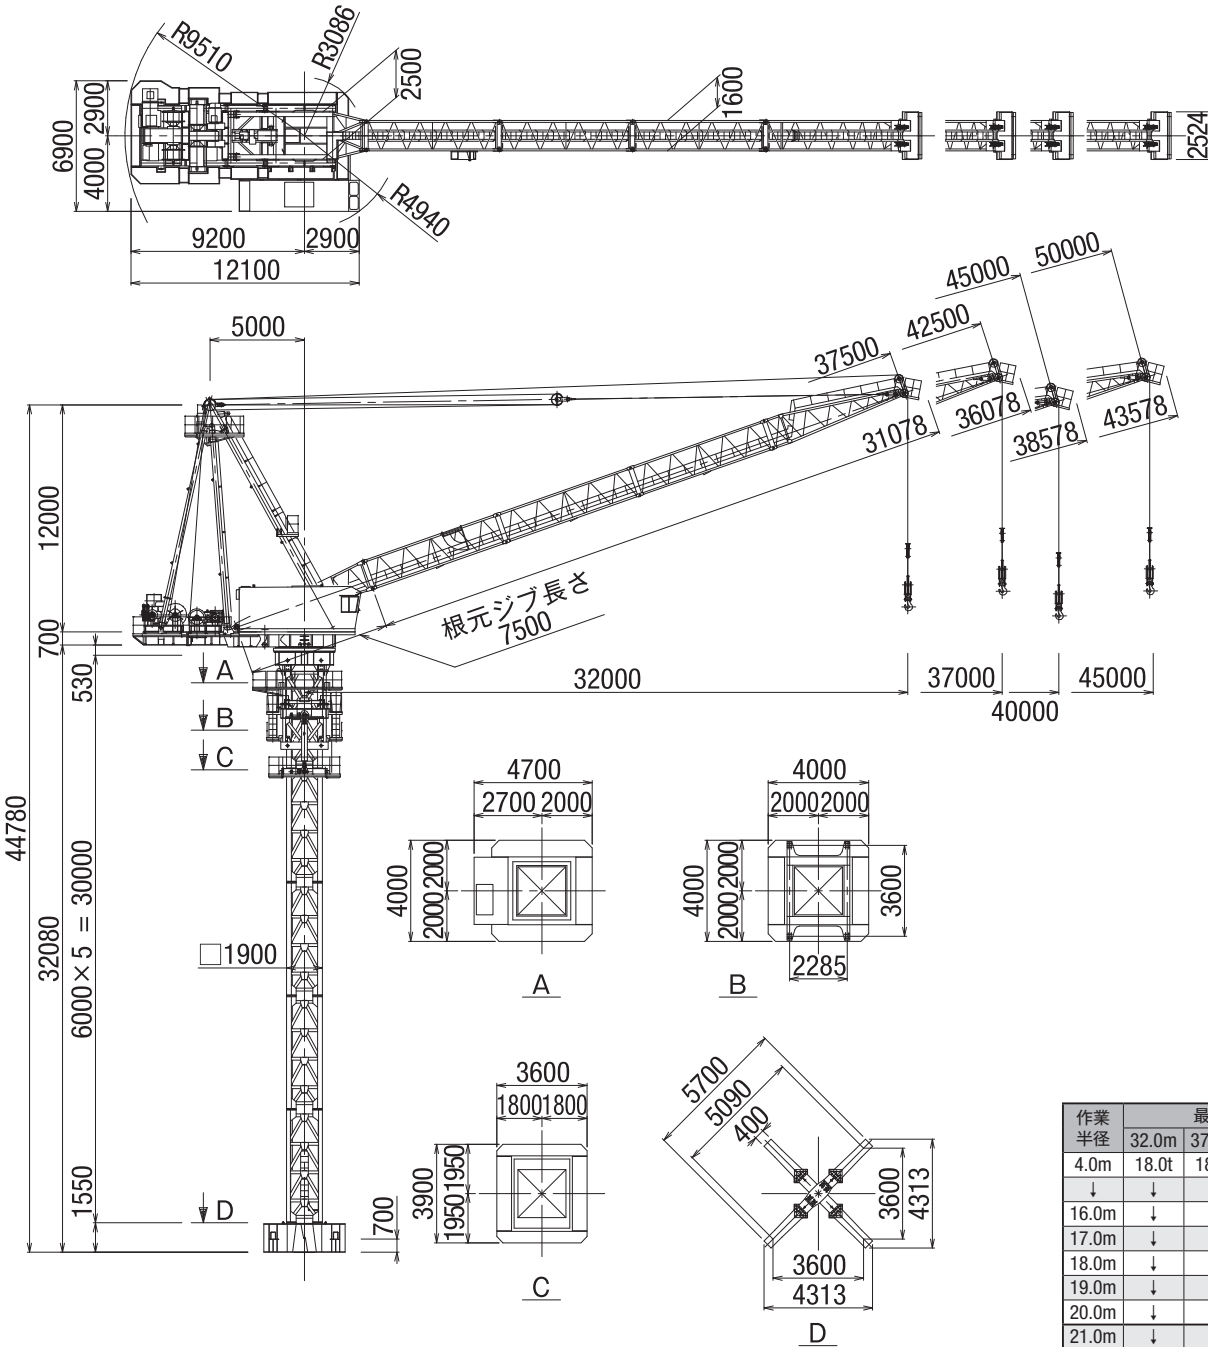

作業半径	最大作業半径			
	32.0m	37.0m	40.0m	45.0m
4.0m	18.0t	18.0t	18.0t	14.0t
↓	↓	↓	↓	↓
16.0m	↓	↓	↓	14.0t
17.0m	↓	↓	↓	13.4t
18.0m	↓	↓	18.0t	13.0t
19.0m	↓	↓	17.2t	12.6t
20.0m	↓	16.5t	14.4t	10.8t
21.0m	↓	↓	15.9t	11.8t
22.0m	↓	18.0t	15.4t	11.4t
23.0m	↓	17.2t	14.9t	11.1t
24.0m	↓	16.5t	14.4t	10.8t
25.0m	18.0t	15.8t	14.0t	10.5t
26.0m	16.9t	15.3t	13.5t	10.2t
27.0m	16.2t	14.7t	13.2t	9.9t
28.0m	15.6t	14.2t	12.8t	9.6t
29.0m	15.0t	13.7t	12.5t	9.4t
30.0m	14.6t	13.3t	12.2t	9.2t
31.0m	14.2t	12.9t	11.8t	8.9t
32.0m	14.0t	12.6t	11.5t	8.6t
33.0m		12.3t	11.2t	8.4t
34.0m		11.9t	11.0t	8.2t
35.0m		11.6t	10.8t	8.1t
36.0m		11.3t	10.6t	7.9t
37.0m		11.0t	10.4t	7.8t
38.0m			10.2t	7.7t
39.0m			10.1t	7.6t
40.0m			10.0t	7.5t
41.0m				7.4t
42.0m				7.3t
43.0m				7.2t
44.0m				7.1t
45.0m				7.0t

名称		OTA-450N			
定格荷重	t	18 - 14	18 - 11	18 - 10	14 - 7
作業半径	m	25 - 32	22 - 37	18 - 40	16 - 45
揚程	m	250			
速度	巻上 早巻	128 - 40 (1.2t - 10.2t)			
	巻上 遅巻	80 - 25 (3.7t - 18t)			
	起伏	sec	120		
	旋回	r.p.m	0.48		
電動機	昇降	m/min   50/60Hz	0.3/0.36		
	巻上		110		
	起伏		45		
	旋回		15		
	昇降		15		
操作		運転室			
電源容量	kVA · A	250 · 400			
電源	V   50/60Hz	400/440			