

クライミングクレーン

ダム用クレーン

ジブクレーン



固定式ジブクレーン 外装取付用

解体用ジブクレーン

解体用小分解型ジブクレーン

クレーン周辺機器その他

参考資料

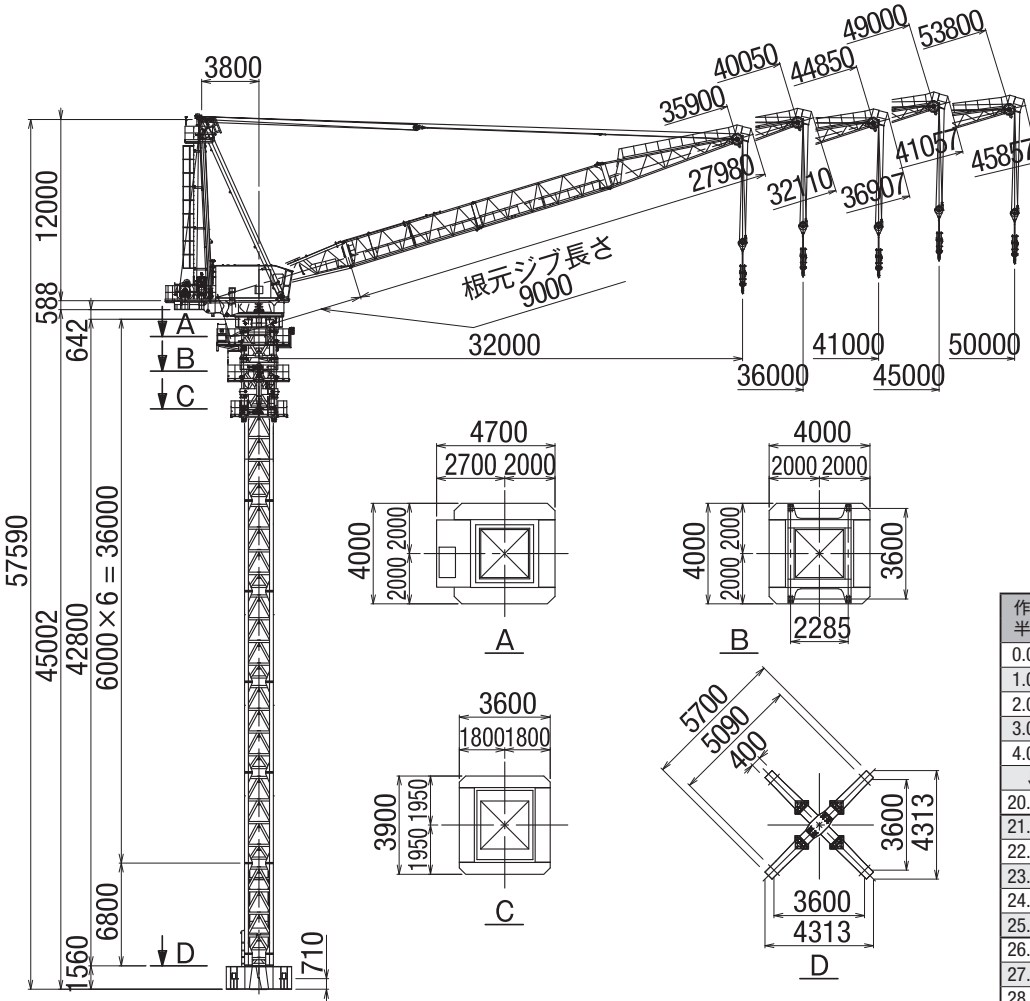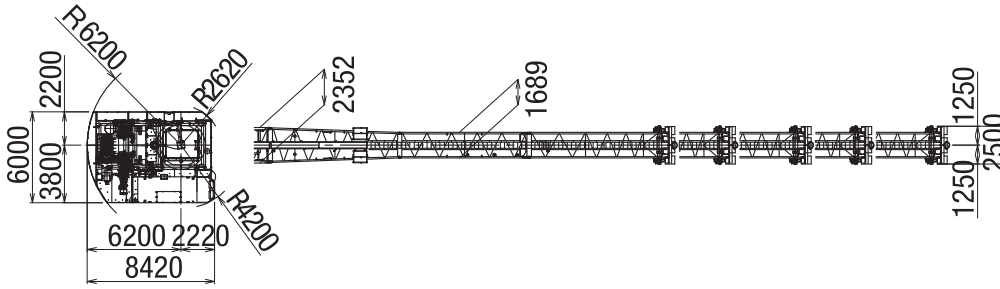

名称		OTA-480NH				
定格荷重	t	14	11.6	9.6	7.6	4
作業半径	m	32	36	41	45	50
揚程	m	258m				
速度	巻上	m/min 28 - 128				
	起伏	sec 10.3 - 107				
	旋回	r.p.m 0.44				
	昇降	m/min 50/60Hz 0.55/0.66				
電動機	巻上	kW 110				
	起伏	kW 39				
	旋回	kW 19.5				
	昇降	kW 22				
操作		運転室				
電源容量	kVA・A	250・400				
電源	V	50/60Hz 400/440				

作業半径	最大定格荷重					
	32.0m	36.0m	41.0m	45.0m	50.0m	
0.0m	10.0t	10.0t	10.0t	10.0t	10.0t	
1.0m	13.3t	13.3t	13.3t	11.5t	↓	
2.0m	16.7t	16.7t	16.7t	13.0t	↓	
3.0m	20.0t	20.0t	20.0t	14.5t	↓	
4.0m	↓	↓	↓	16.0t	↓	
↓	↓	↓	↓	↓	↓	
20.0m	↓	↓	↓	16.0t	10.0t	
21.0m	↓	↓	↓	15.3t	9.6t	
22.0m	↓	↓	20.0t	14.7t	9.2t	
23.0m	↓	20.0t	19.1t	14.1t	8.8t	
24.0m	20.0t	19.3t	18.3t	13.5t	8.5t	
25.0m	19.3t	18.5t	17.5t	13.0t	8.1t	
26.0m	18.5t	17.7t	16.7t	12.5t	7.8t	
27.0m	17.8t	16.9t	16.0t	12.0t	7.5t	
28.0m	17.0t	16.0t	15.3t	11.6t	7.2t	
29.0m	16.3t	15.4t	14.7t	11.2t	7.0t	
30.0m	15.5t	14.8t	14.1t	10.8t	6.7t	
31.0m	14.8t	14.3t	13.5t	10.4t	6.5t	
32.0m	14.0t	13.7t	13.0t	10.0t	6.2t	
33.0m		13.2t	12.5t	9.7t	6.0t	
34.0m		12.6t	12.0t	9.4t	5.7t	
35.0m		12.1t	11.7t	9.1t	5.4t	
36.0m		11.6t	11.3t	8.9t	5.2t	
37.0m			11.0t	8.7t	5.0t	
38.0m			10.7t	8.5t	4.8t	
39.0m			10.3t	8.3t	4.7t	
40.0m			10.0t	8.2t	4.6t	
41.0m				9.6t	8.1t 4.5t	
42.0m					7.9t 4.4t	
43.0m					7.8t 4.3t	
44.0m					7.7t 4.3t	
45.0m					7.6t 4.2t	
46.0m						4.2t
47.0m						4.1t
48.0m						4.1t
49.0m						4.0t
50.0m						4.0t