


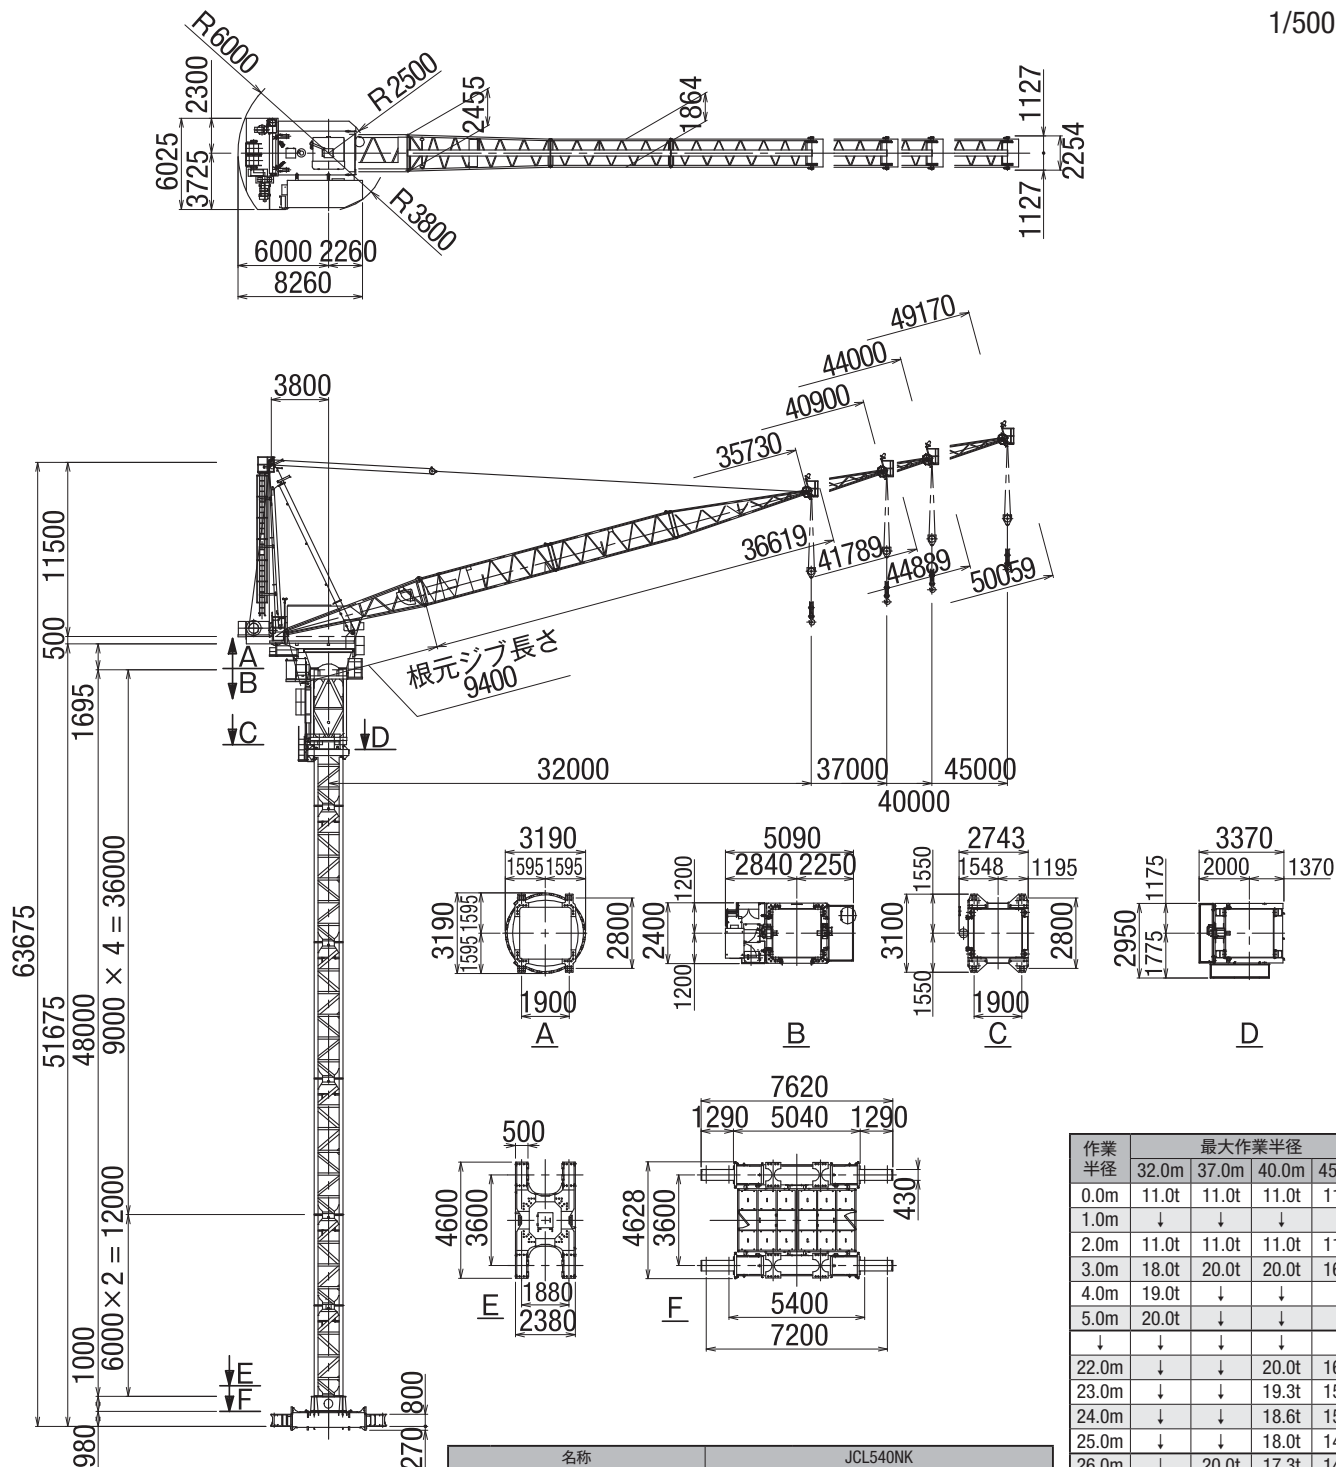

名称		JCL540NK				
定格荷重	t	20－16.5	20－13	20－11	16－7	
作業半径	m	27－32	26－37	22－40	22－45	
最大揚程 (m)		270	265	260	215	
最大設置高さ (m)		260	255	250	200	
旋回角度		全旋回 (無制限)				
速度	巻上	ノッチ	1～5			
		荷重 (t)	20～20～2			
	速度	m/s	0～0.6～2.0			
		m/min	0～36～121			
	起伏	m/s	0.35	0.41	0.45	0.44
		s	84	83	82	96
	旋回	rad/s	0.052～0.063 (任意設定)			
		rpm	0.5～0.6 (任意設定)			
	昇降	m/s	0.008 (0.010 60Hz 時)			
		m/min	0.49 (0.59 60Hz 時)			
電動機	巻上	145kW 4P 40% ED インバータ制御				
	起伏	30kW 4P インバータ制御				
	旋回	11kW 4P インバータ制御				
	昇降	22kW 6P 油圧制御				
電源容量		kVA・A	230・400			
電源		400V 50Hz (440V 60Hz)				

作業半径	最大作業半径			
	32.0m	37.0m	40.0m	45.0m
0.0m	11.0t	11.0t	11.0t	11.0t
1.0m	↓	↓	↓	↓
2.0m	11.0t	11.0t	11.0t	11.0t
3.0m	18.0t	20.0t	20.0t	16.0t
4.0m	19.0t	↓	↓	↓
5.0m	20.0t	↓	↓	↓
↓	↓	↓	↓	↓
22.0m	↓	↓	20.0t	16.0t
23.0m	↓	↓	19.3t	15.5t
24.0m	↓	↓	18.6t	15.0t
25.0m	↓	↓	18.0t	14.5t
26.0m	↓	20.0t	17.3t	14.0t
27.0m	20.0t	19.2t	16.7t	13.5t
28.0m	19.2t	18.4t	16.1t	13.0t
29.0m	18.4t	17.6t	15.5t	12.5t
30.0m	17.7t	16.8t	15.0t	12.1t
31.0m	17.1t	16.1t	14.5t	11.6t
32.0m	16.5t	15.5t	14.0t	11.2t
33.0m		15.0t	13.6t	10.8t
34.0m		14.4t	13.2t	10.4t
35.0m		13.9t	12.8t	10.0t
36.0m		13.5t	12.4t	9.6t
37.0m		13.0t	12.1t	9.3t
38.0m			11.7t	9.0t
39.0m			11.3t	8.7t
40.0m			11.0t	8.4t
41.0m				8.1t
42.0m				7.8t
43.0m				7.5t
44.0m				7.3t
45.0m				7.0t